

Square Industrial Bulkhead

Giantlight

EFFECT LIGHTING







Giantlight (PTY) LTD

Tel: +27 11 704 1450 / +27 82 451 5506

169 Bush Telegraph Rd, Northlands Business Park North Riding Gauteng South Africa

www.giantlight.co.za email: otto@giantlight.co.za; wolfgang@giantlight.co.za

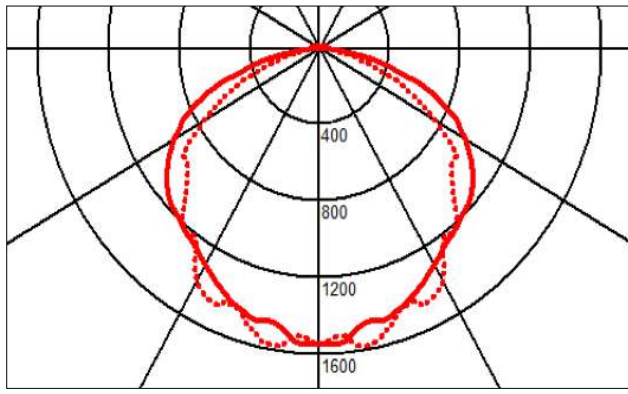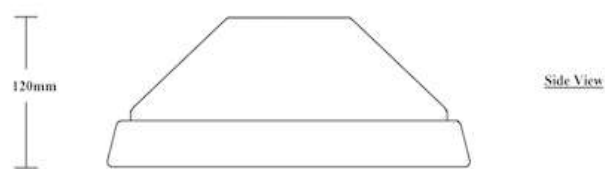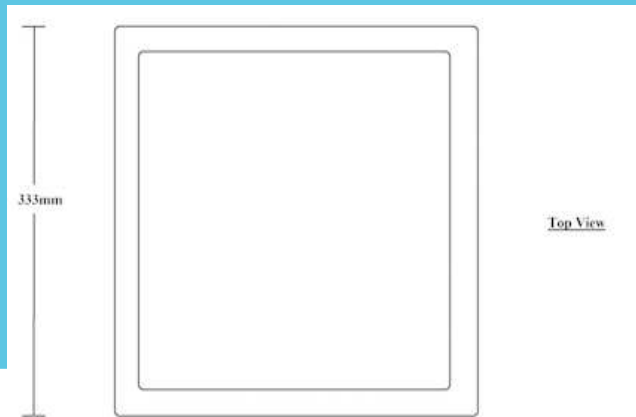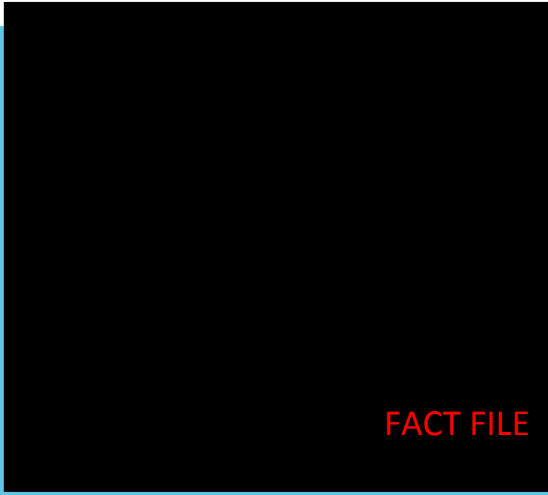

	Fact File
Body construction	LM 6 Aluminium
Cover glass	Impact modified polycarbonate or Acrylic
Lamp type	Seoul or Samsung or Lumileds
Lumen	5168 lumens for 4000K and 5000K.– for 3000K reduce lumen value by 8% Lumens are measured at source – allow 20% losses through lens.
CRI and CCT	CCT Either 3000K or 4000K or 5000K CRI minimum of 82
Supply voltage	230V AC 50hz
Wattage / Amps	38W
IP rating	IP 65

Lumen values are as measured at source - on the PCB - not exiting light fitting.
 Values are subject to change at any time and without notice.