

MEGALEDBAY V3 Supreme  
Jan 2017 edition.

# Giantlight

EFFECT LIGHTING




High efficiency ballast housed  
in this chamber.  
Emergency Lithium ion kit  
Can also be mounted in here.




Rear view of 507 model – can be suspended or attached to P2000 trunking or surface fixed.  
590 x 590 infill plate also available.

Giantlight (PTY) LTD  
Tel: +27 11 704 1450 / +27 82 451 5506  
169 Bush Telegraph Rd, Northlands Business Park North Riding Gauteng South Africa  
www.giantlight.co.za email: otto@giantlight.co.za; wolfgang@giantlight.co.za

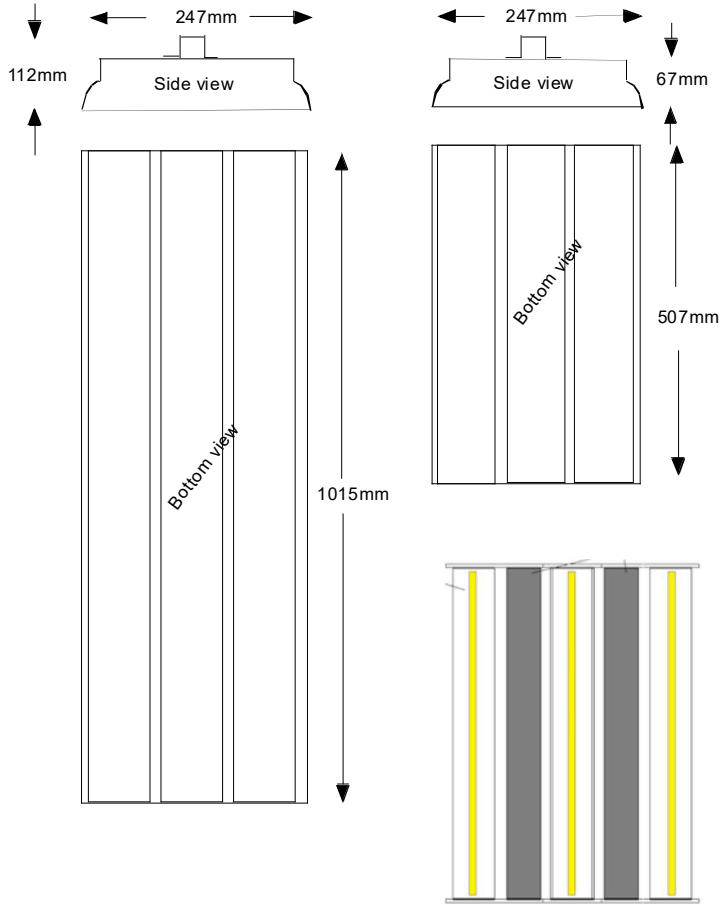

### Supreme polar curve curve

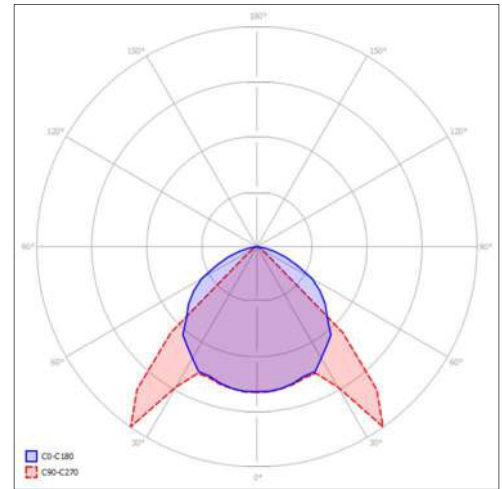

507 - 5 way 150W model  
507mm long x 247mm wide x 67 mm deep

Fact File	
Body Construction	Extruded, chemically polished aluminium reflector channel. End caps mild steel powder coated – (stainless steel 304 optional) Lens - clear acrylic – opal diffuser also available
IP Rating	Standard is IP 44 – IP 65 on request
Control Gear	Helvar or equivalent high efficiency ballast –integral.
507 model 100W Lumens	13696 lumens – at source at 50 degrees operating T.
507 model 100W wattage	100W – total circuit load
507 model 150W lumens	21900 lumens at source at 50 degrees operating T
507 model 150W wattage	150W – total circuit load
1015 200W model lumens	27392 lumens – at source at 50 degrees C operating T
1015 200W model wattage	200W – total circuit load.
Colour T	3000K or 4000K or 5000K
CRI	Always better than 82 – above 90 on request.
Operating T	-20 to +46 C maximum.
Supply V	220 -240V
Installation Data	LDT/IES Files – Available
Dimmable?	Dali – Yes - on request 1-10V – Yes – on request DMX – Yes – on request Triac –Yes – on request

Note – Lumens are measured at source on the PCB – not exiting the light fitting