

LED batton pendant or
surface deep version

Giantlight

EFFECT LIGHTING




Giantlight (PTY) LTD

Tel: +27 11 704 1450 / +27 82 451 5506

169 Bush Telegraph Rd, Northlands Business Park North Riding Gauteng South Africa

www.giantlight.co.za email: otto@giantlight.co.za; wolfgang@giantlight.co.za

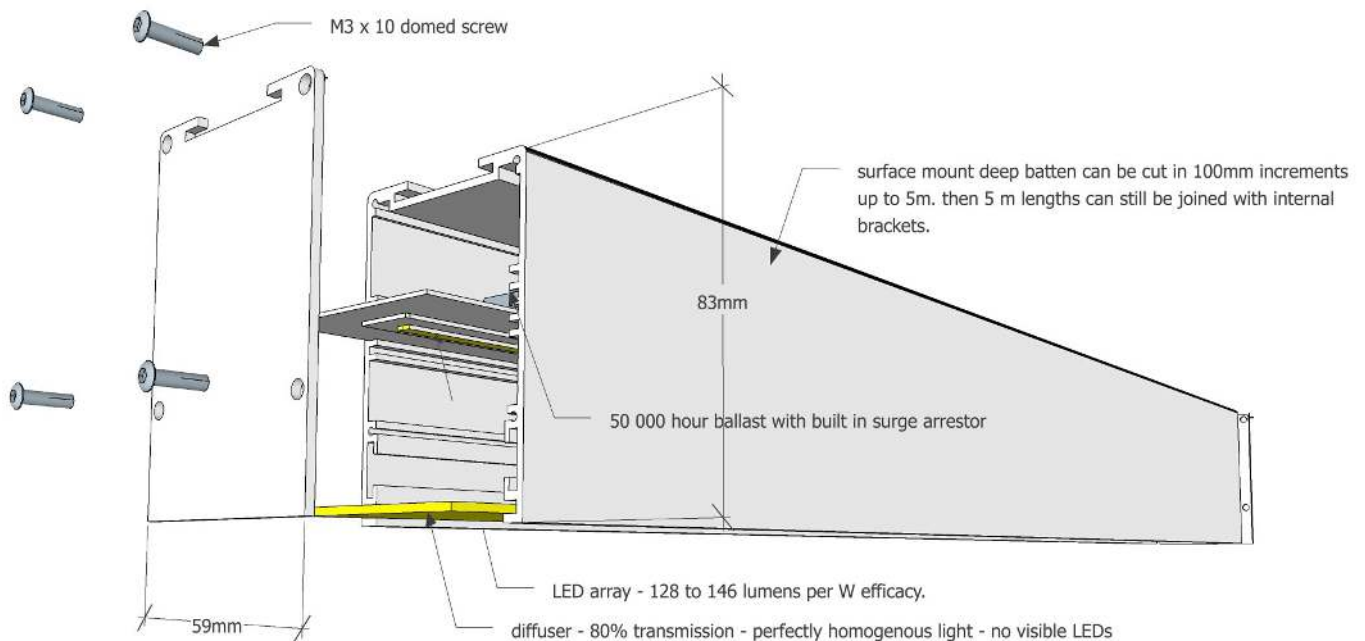

Body Construction	Extruded aluminium - either anodized or powder coated
Lens and Reflector type	120 degree symmetrical distribution. Optional 190 degree lens available Opal lens with 80% transmission.
Lumen options/Watts Length options	divisible in 100mm increments. Per 1000mm -18W 2160 lumens – so if you want 3,6m long length – just multiply by 3,6. Or Per 1000mm - 33W 4120 lumens – so if you want 2,4m – just multiply values by 2,4 Up to 5 metres in a single length – multiples of 5m can be joined.
Supply Voltage	230V AC 50HZ
IP Rating	IP 44 – splash proof
Control Gear	50 000 hour Tridonic or Helvar or TCI – internally mounted
Installation Data	IES Files – Yes
Dimmable?	Standard – no but with correct gear – then; Dali – Yes 1-10V – Yes DMX – Yes Triac -Yes

Lumen values are as measured at source - on the PCB - not exiting light fitting.
Values are subject to change at any time and without notice.

Options

