

Street LED 25W and 50W
Supreme

Giantlight

EFFECT LIGHTING




Giantlight (PTY) LTD

Tel: +27 11 704 1450 / +27 82 451 5506

169 Bush Telegraph Rd, Northlands Business Park North Riding Gauteng South Africa

www.giantlight.co.za email: otto@giantlight.co.za; wolfgang@giantlight.co.za

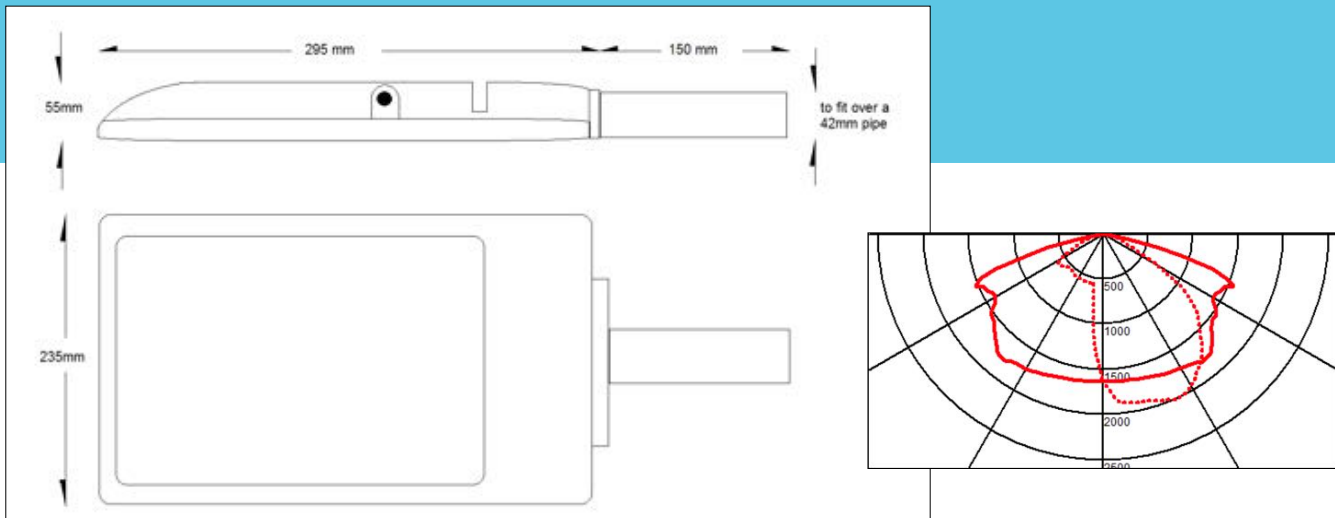

| Fact file | |
|---------------------|---|
| Body construction | Die cast LM6 aluminium anodised and powder coated / Yoke hot dip galvanised steel or SS on request. |
| Lens type | Toughened 4mm glass |
| LED type | Luminus or Lumileds 5050 |
| Power supply type | Helvar or Tridonic or TCI - long life power supply 50 000 hours plus – with surge arresor built in. |
| Lumen options | 25W – 3650 lumens on PCB – not exiting the light fitting. 50W – 7300 lumens on PCB – not exiting the light fitting |
| CCT and CRI | 5000K or 4000K or 3000K – minimum CRI 80 In the case of 3000K reduce lumen values by 8% |
| Supply voltage | 230V AC 50HZ |
| Wattage | 25W or 50W |
| IP rating | IP 65 |
| Control Type | Standard - no control, on or off DMX control available DALI control available |
| Power factor | Better than 0,9 |
| IES files available | Yes |

Lumen values are as measured at source - on the PCB - not exiting light fitting.
Values are subject to change at any time and without notice.