

LED batton pendant  
or surface mount


# Giantlight

EFFECT LIGHTING

Squares or rectangles or straight – pendant or surface mounted




Straight lengths – up to 5m in one piece.  
These can then be joined to make longer pieces

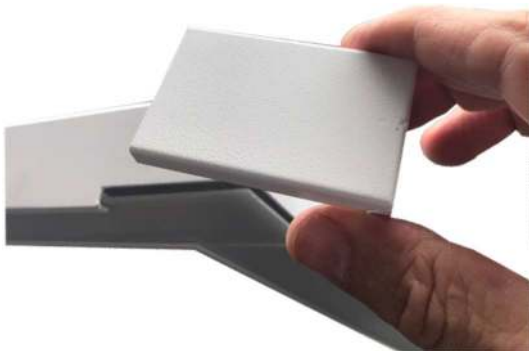

Corner piece removable to allow for maintenance – magnetic – tools free

Giantlight (PTY) LTD  
Tel: +27 11 704 1450 / +27 82 451 5506  
169 Bush Telegraph Rd, Northlands Business Park North Riding Gauteng South Africa  
[www.giantlight.co.za](http://www.giantlight.co.za) email: [otto@giantlight.co.za](mailto:otto@giantlight.co.za); [wolfgang@giantlight.co.za](mailto:wolfgang@giantlight.co.za)

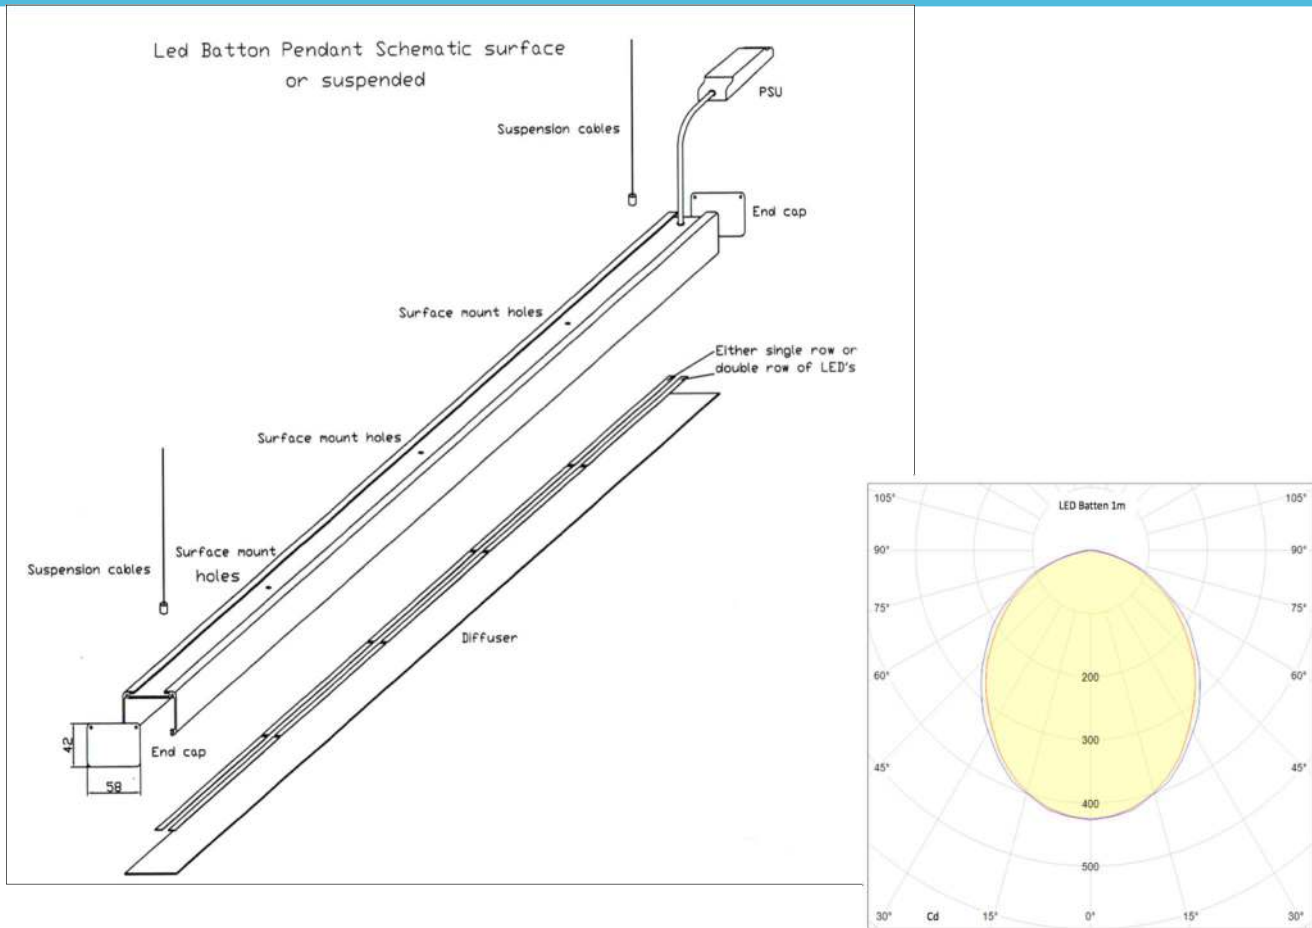

Body Construction	Extruded aluminium - either anodized or powder coated
Lens and Reflector type	120 degree wing configuration Opal/fresnel lens optional
Lumen options/Watts	18W/m – 2304 lumens 36W/m – 4608 lumens
Supply Voltage	230V AC 50HZ
IP Rating	IP 20
Control Gear	External
Installation Data	IES Files – Yes
Dimmable?	Standard – no but with correct gear – then; Dali – Yes 1-10V – Yes DMX – Yes Triac -Yes

Lumen values are as measured at source - on the PCB - not exiting light fitting.  
Values are subject to change at any time and without notice.