

Bollard

Giantlight

EFFECT LIGHTING




Giantlight (PTY) LTD

Tel: +27 11 704 1450 / +27 82 451 5506

169 Bush Telegraph Rd, Northlands Business Park North Riding Gauteng South Africa

www.giantlight.co.za email: otto@giantlight.co.za; wolfgang@giantlight.co.za

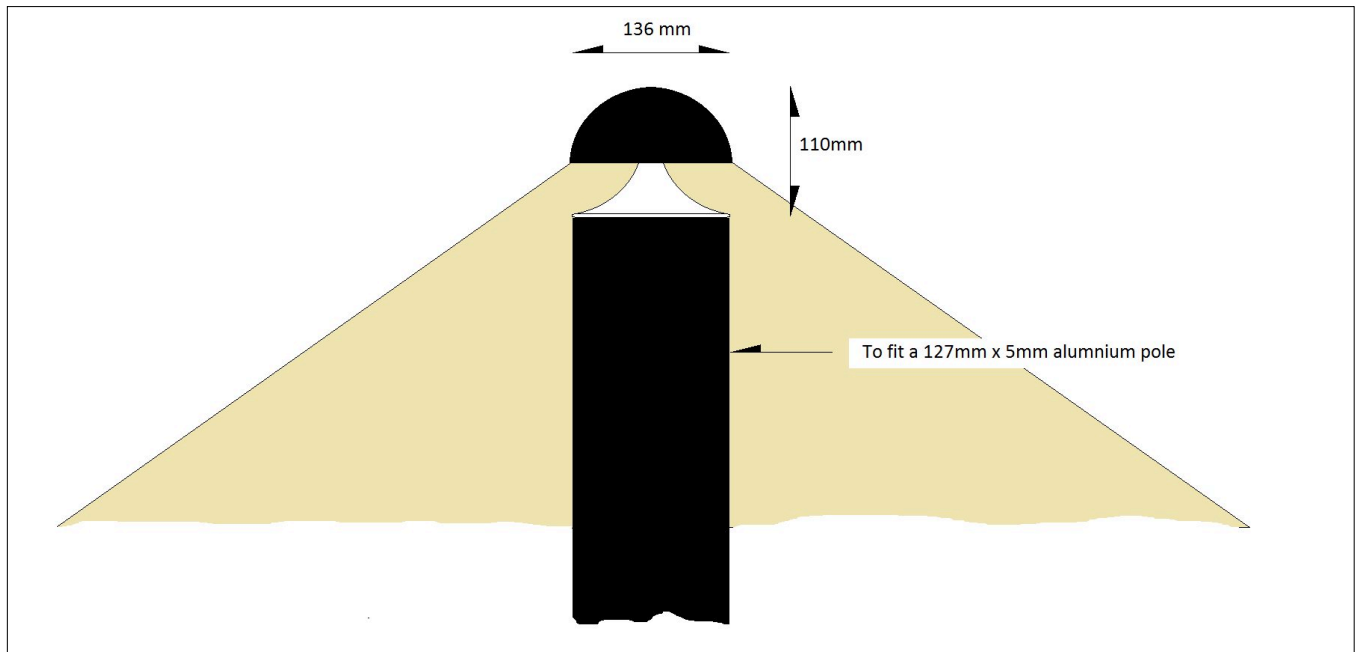

Body Construction	Glass filled Polypropylene
Lens	Clear or frosted acrylic
Lumen options/Watts	12W – 1500 lumens
CRI and CCT	Always higher than 82CRI 3000K 4000K and 5000K standard.
Supply Voltage	230V AC 50HZ
IP Rating	IP 66
Control Gear	50 000 hour Tridonic or Helvar or TCI – internally mounted
Installation Data	IES Files – Yes
Dimmable?	Standard – no but with correct gear – then; Dali – Yes 1-10V – Yes DMX – Yes Triac -Yes
Recommended mounting height	600mm or 1000mm
Operating conditions	-20C up to 40C

Lumen values are as measured at source - on the PCB - not exiting light fitting.
Values are subject to change at any time and without notice.