


LED Batten Pendant or  
Surface Deep Version





## FACT FILE:

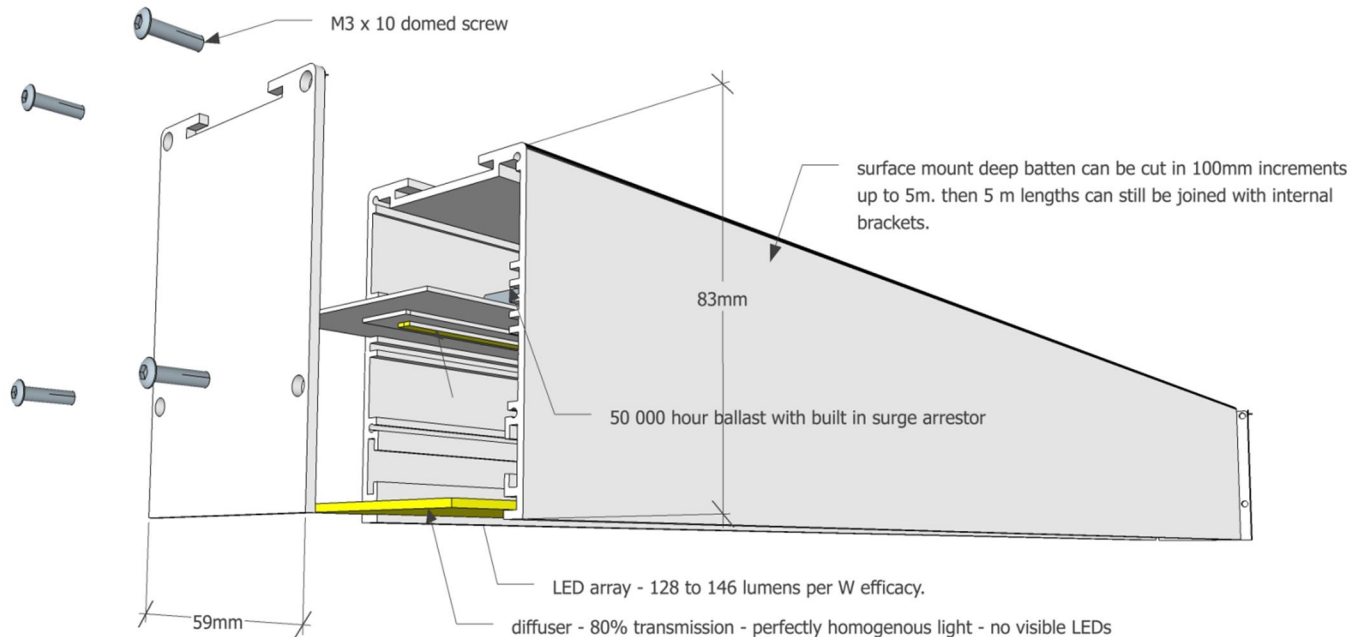

Body Construction	Extruded aluminium - either anodized or powder coated
Lens and Reflector type	120 degree symmetrical distribution. Optional 190 degree lens available Opal lens with 80% transmission.
Lumen options/Watts Length options	divisible in 100mm increments. Per 1000mm -18W 3000 lumens – so if you want 3,6m long length – just multiply by 3,6. Or Per 1000mm - 36W 6000 lumens – so if you want 2,4m – just multiply values by 2,4 Up to 5 metres in a single length – multiples of 5m can be joined.
Supply Voltage	230V AC 50HZ
IP Rating	IP 44 – splash proof
Power factor	Better than 0.95
Control Gear	100 000 hour Tridonic or Helvar or TCI – internally mounted
Installation Data	IES Files – Yes
Dimmable?	Standard – no but with correct gear – then; Dali – Yes 1-10V – Yes DMX – Yes Triac -Yes

Lumen values are as measured at source – on the PCB – not exiting light fitting.  
Due to the fast pace of development – values are subject to change at any time  
and without notice.



Options

FACT FILE:

