




Square Industrial Bulkhead

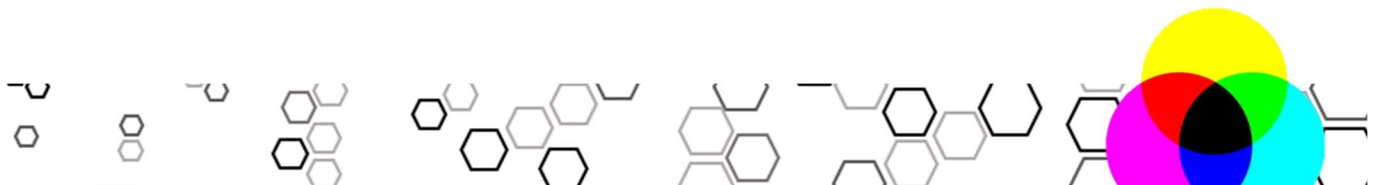


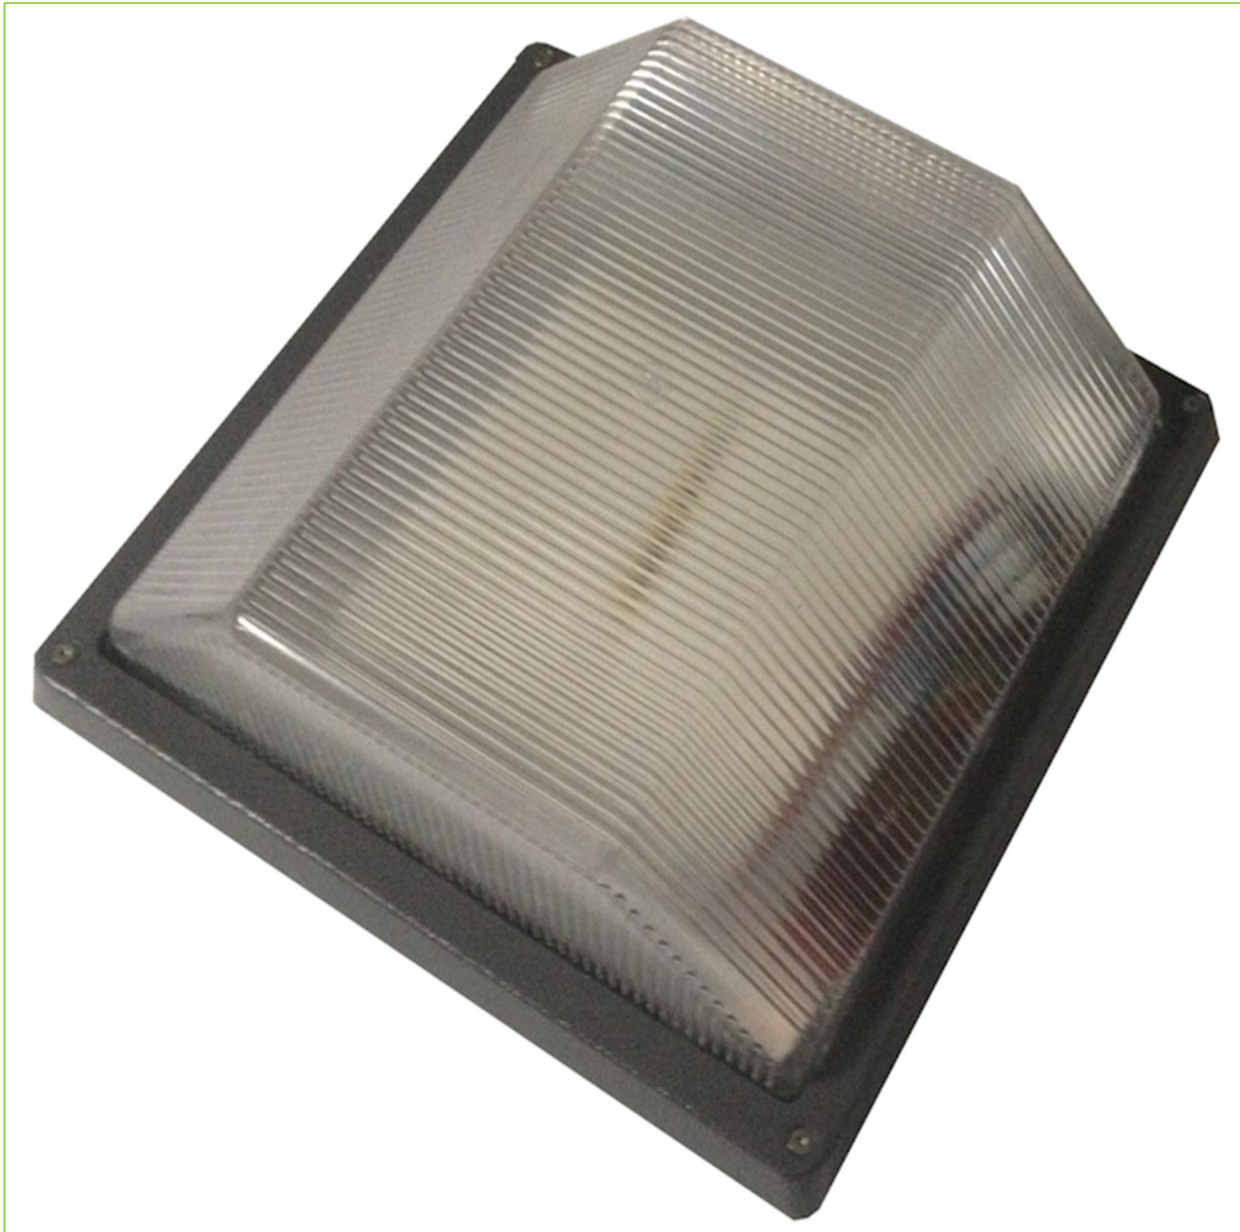


Top View

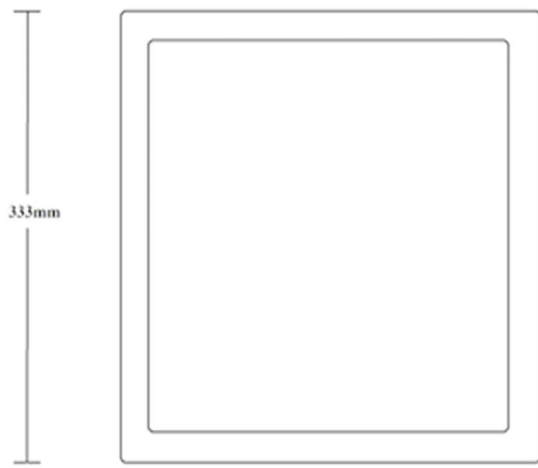

FACT FILE:

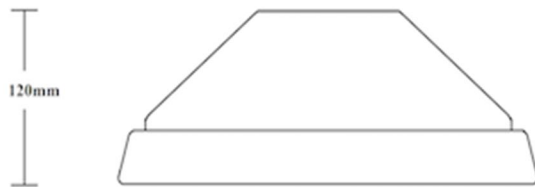

Side View

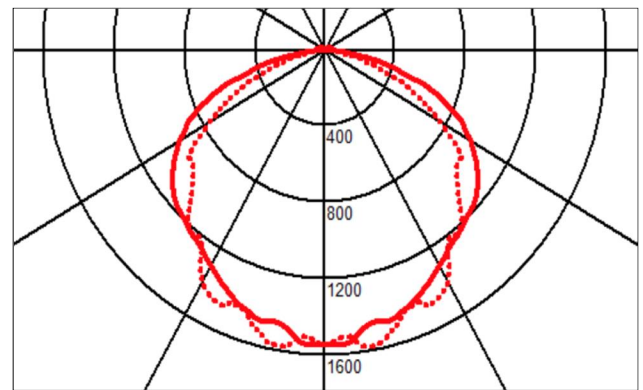

	Fact File
Body construction	LM 6 Aluminium
Cover glass	Impact modified polycarbonate or Acrylic
Lumen	5500 lumens for 4000K and 5000K.– for 3000K reduce lumen value by 8% Lumens are measured at source – allow 20% losses through lens.
CRI and CCT	CCT Either 3000K or 4000K or 5000K CRI minimum of 82
Supply voltage	230V AC 50hz
Wattage / Amps	38W
Power Factor	Better than 0.95
IP rating	IP 65

Lumen values are as measured at source – on the PCB – not exiting light fitting.
Due to the fast pace of development – values are subject to change at any time
and without notice.