





Large In-Ground Up Light





## FACT FILE:

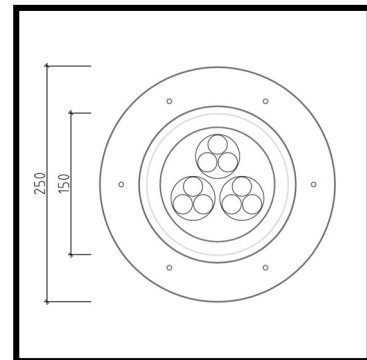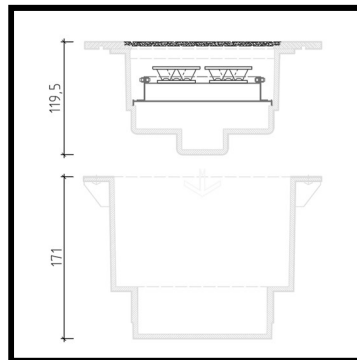

	<b>Single Colour</b>	<b>RGBW</b>
Body construction	Die cast Aluminium (LM6) or ABS (Plastic)	Die cast Aluminium (LM6) or ABS (Plastic)
Cover plate	Stainless steel 316 with 8mm toughened glass	Stainless steel 316 with 8mm toughened glass
Light output data	Narrow 15 degree or medium 38 degree or wide 60 degree beam – 1450 lumens initial on PCB. 3000K or 4000K or 5000K	RGBW – in Octoled with pucks or resistor PCB – for bespoke power supply.
Supply voltage	Either 230V AC or 12V AC	Appropriate colour control system.
Wattage / Amps	11W	11W
IP rating	Double IP 68	Double IP 68
Installation data	Available	Available
This product can be driven over once installed.		

Lumen values are as measured at source - on the PCB - not exiting light fitting.  
Due to the fast pace of development - values are subject to change at any time  
and without notice.