




Led Hibay

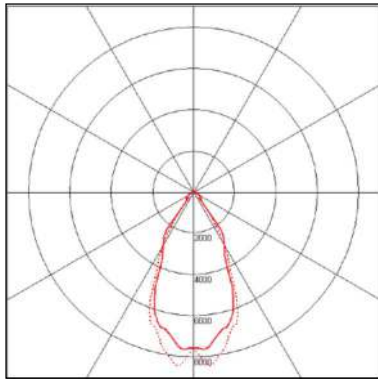

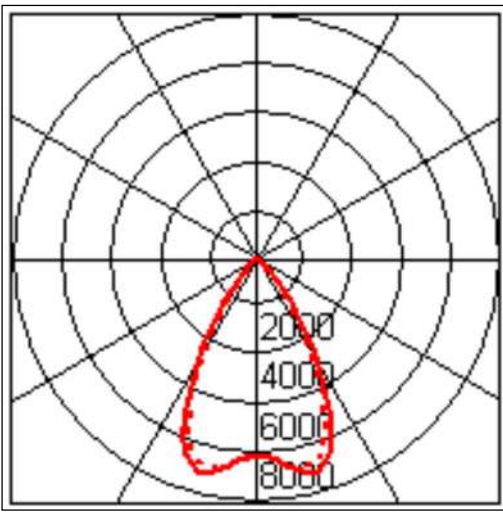

FACT FILE

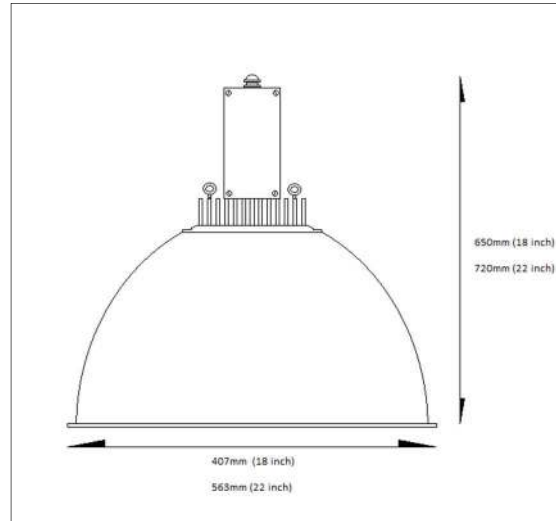

Fact file		
	70W	146W
Control chamber	Cast aluminium -	Cast aluminium
Reflector	Either acrylic - or anodised aluminium	Either acrylic - or anodised aluminium
Lumen options	Neutral white 5000K – 9100lumens Warm white 3000K – 8372 lumens	Neutral white 5000K - 18980 lumens Warm white 3000K – 17461 lumens
Supply voltage	230V AC 50HZ	230V AC 50HZ
Wattage	70W total circuit load ????	146W total circuit load
Power factor	0,96	0,96
IP rating	IP 20	IP 20
Control Type options	Standard - no control, on or off Dimmable with triac dimming DMX control available DALI control available	Standard - no control, on or off Dimmable with triac dimming DMX control available DALI control available
Installation data	Available along with IES files for Relux	Available along with IES files for Relux

Lumen values are as measured at source - on the PCB - not exiting light fitting.
Due to the fast pace of development - values are subject to change at any time
and without notice.