

Opal 80 lay in 595 x 595 LED



Round




Square




Surface Mount option available




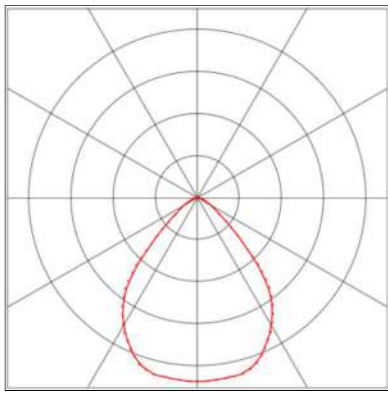

## FACT FILE:

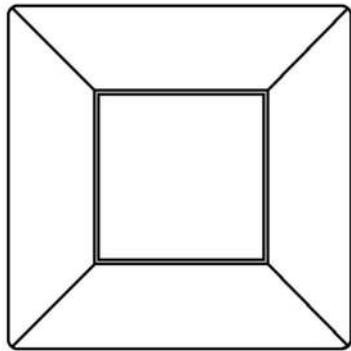

595mm



T  
100mm  
↓

	Opal 80 square or round 595 x 595 x 100
Body construction	Acrylonitrile Butadiene Styrene (ABS - Engineering plastic)
Lens and reflector type	Acrylic - frosted, opal-80% transmission or prismatic clear 90% transmission
Colour of trim	Standard is ferrograin white - ABS can be wet sprayed for special colours - on request.
Lumen options	30W - 146 lumens per W - 4380 lumens at source 42W - 146 lumens per W - 6132 lumens at source
CRI CCT	Standard CRI is +80 although +90 is available on special request 3000K or 4000K or 5000K
Supply voltage	230V AC 50HZ
Power factor	0.95 or better
IP rating	IP 20
Control Type	Standard - no control, on or off 1-10V control available DMX control available DALI control available KNX control available
IES files	Available

Lumen values are as measured at source - on the PCB - not exiting light fitting.  
Due to the fast pace of development - values are subject to change at any time  
and without notice.