




FACT FILE:

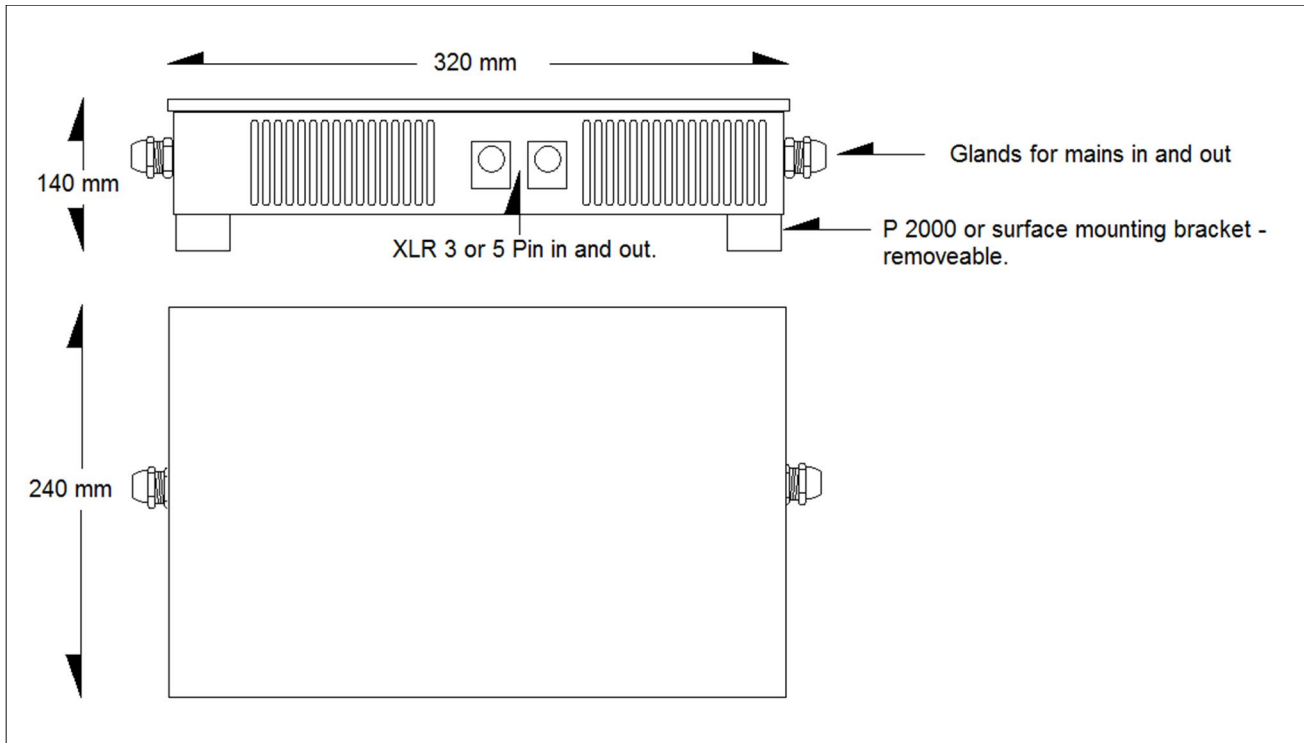

Body construction	Mild steel – powder coated
Ports	DMX – XLR chassis mount in and out – either 3 pin or 5 pin
Input Voltage	230V AC
DMX Decoder	4 channels standard – each channel rated at 8A 5 channels and ultra high frequency – optional for film studios.
Cooling	Force cooled (fan – rated at 100 000 hours)
Wattage	200 - 600W
IP rating	IP20