





Aisle Light - Low Glare for
Retail Merchandise Shelving





FACT FILE:

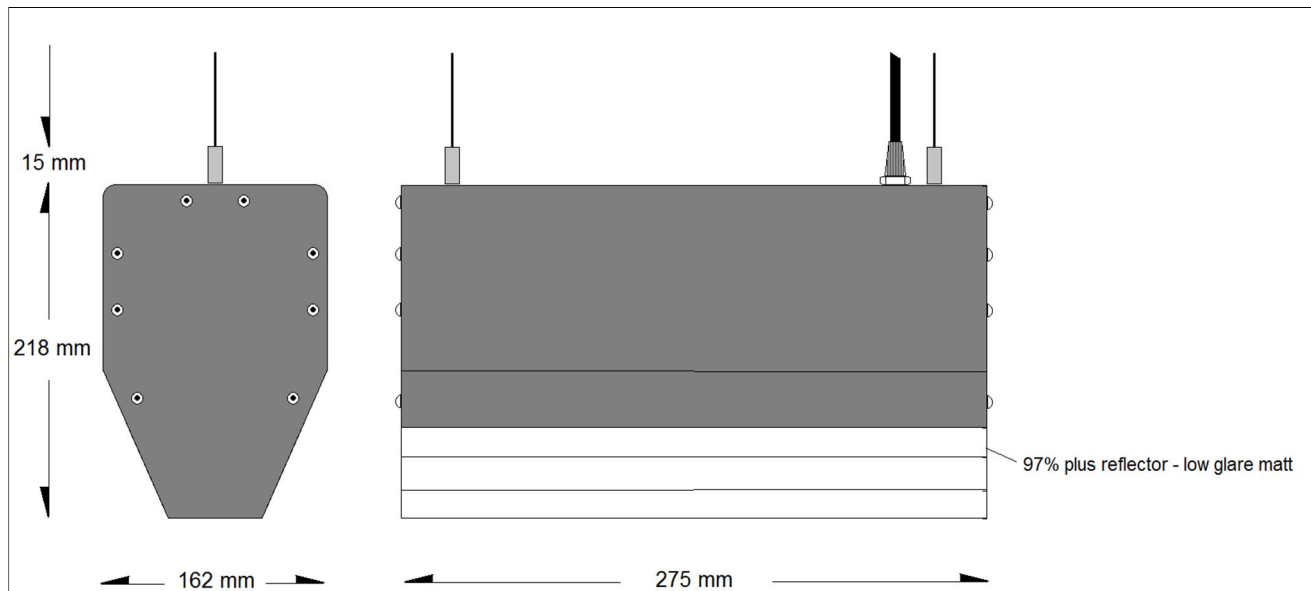

Fact File	
Body Construction	Mild steel powder coated
Reflector	Highly reflective low glare polished and anodised alumium – above 90% reflectivity
IP Rating	IP 20
Control Gear	100 000 hour high efficiency power supply within.
LED Type	Either Lumileds or Seoul 5050 – thermally controlled for LM80 at 60 000 hours
Power	90W total circuit load
Lumen output	13140 lumens at source
Colour T	Standard is 3000K or 4000K or 5000K Bespoke CCT like 3500 or 4500 or 6500 also available on request
CRI	Always better than 84 – above 90 on request.
Operating T	-20 to +46 C maximum.
Supply V	220 -250V
Installation Data	LDT/IES Files – Available
Dimmable?	Standard – not dimmable Dali – Yes - on request 1-10V – Yes – on request DMX – Yes – on request

Lumen values are as measured at source – on the PCB – not exiting light fitting.
Due to the fast pace of development – values are subject to change at any time
and without notice.

