




FACT FILE:

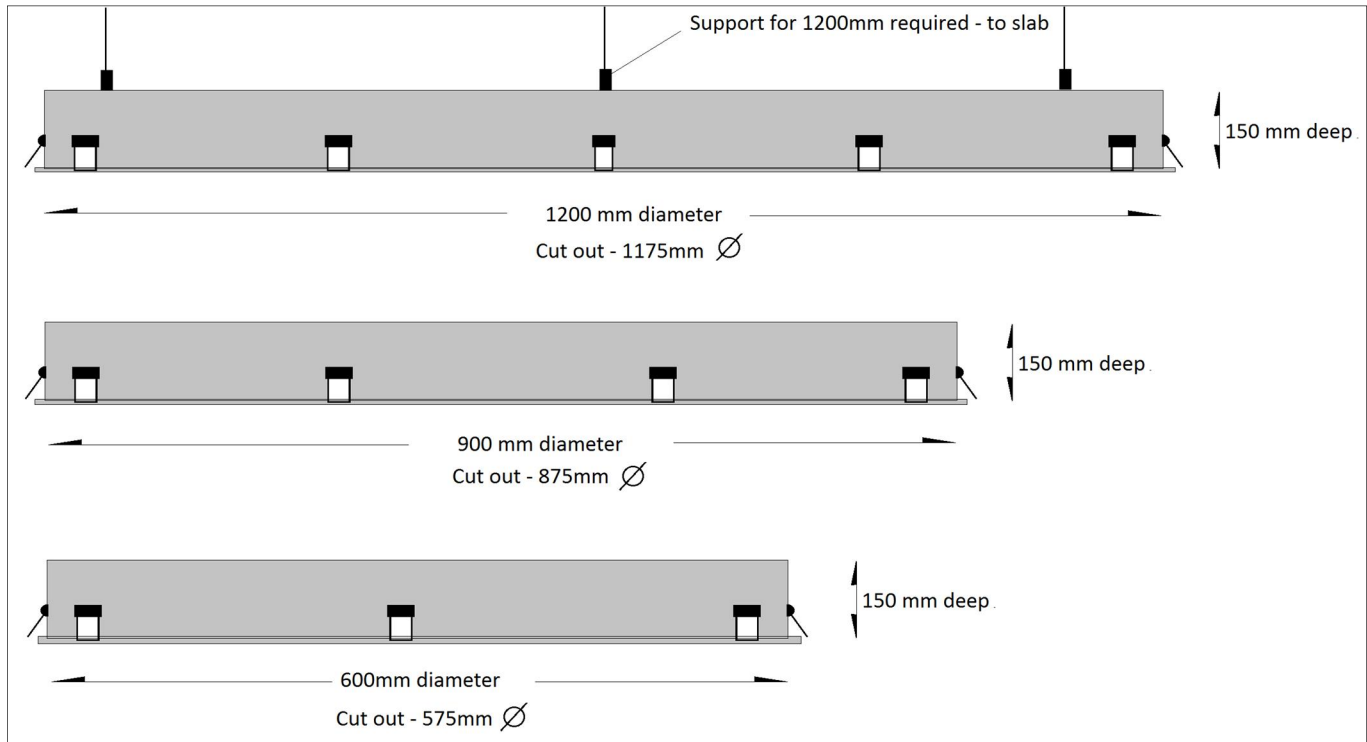

Body Construction	Mild steel – powder coated
Lens and Reflector type	Opal lens standard – factor 25% losses through lens fresnel lens optional
Lumen options/Watts	1200mm – 70W Standard 9000 lumens at source 900mm – 50W Standard 6400 lumens at source 600mm – 30W Standard 3840 lumens at source Lumens are measured at source on the PCB – allow 25% losses through opal diffuser.
Supply Voltage	230V AC
IP Rating	IP 20 or IP 44
Control Gear	Integral.
Installation Data	IES Files – No –please use lumen method for calculating light levels.
Dimmable?	Standard – no but with correct gear – then; Dali – Yes 1-10V – Yes DMX – Yes This product is ideally suited for colourmixing and colour changing effects

Lumen values are as measured at source – on the PCB – not exiting light fitting.
Due to the fast pace of development – values are subject to change at any time
and without notice.