




Unlimited stackability



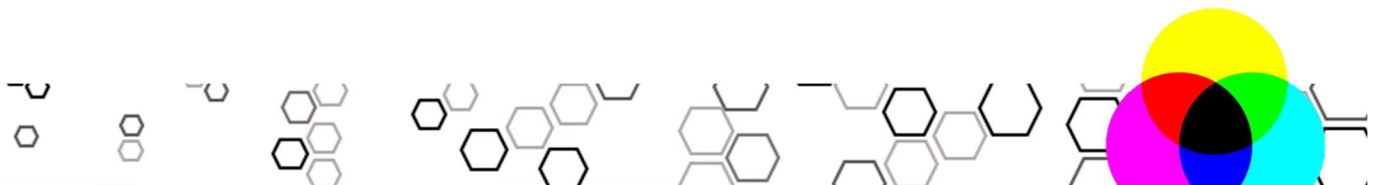

## FACT FILE:

### Single cell dimensions

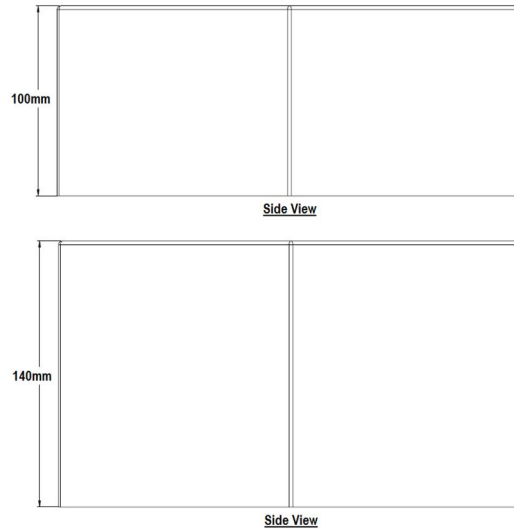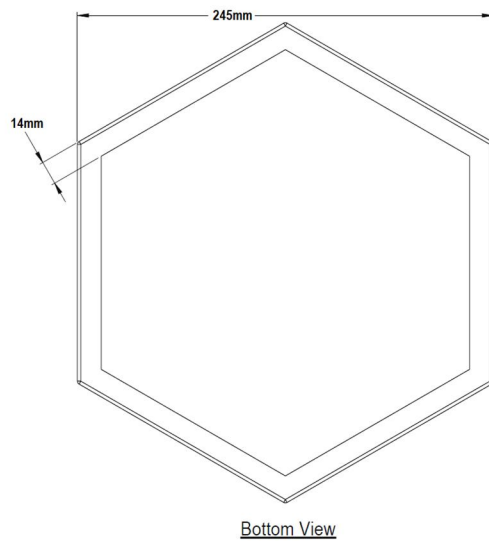

	6W	15W
Body Construction	Mild Steel – Powder coated	
Installation type	Can be surface mounted or suspended	
Lumens	770	1920
CCT available	3000K, 4000K and 5000K	
CRI	Min 80	
Supply Voltage	230V AC 50HZ	
IP Rating	IP 20	
Control Gear	Integral	
Installation Data	IES Files – Yes	
Dimmable?	Standard – no but with correct gear – then; Dali – Yes 1-10V – Yes DMX – Yes	

Lumen values are as measured at source – on the PCB – not exiting light fitting.  
Due to the fast pace of development – values are subject to change at any time  
and without notice.