


Softlight Tilt Square single and duo - (Flush plaster option)



Spring mounted with a trim ring
In single or double.




Flush plaster option in
single or double

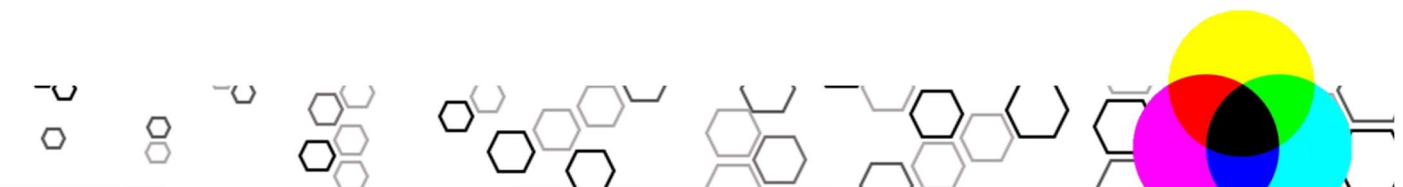



FACT FILE:

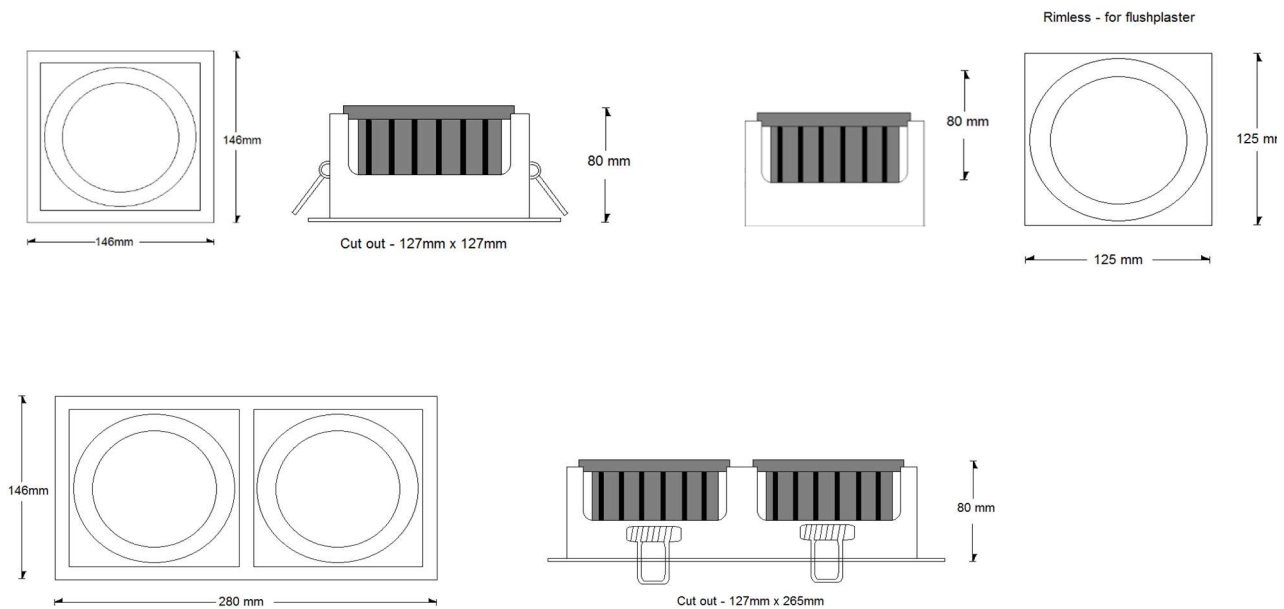

SOFTLIGHT tilt square downlights		
	Softlight tilt single – either flush palster or with trim	Softlight tilt double– either flush palster or with trim
Trim construction	Mild steel powder coated – for outer trim - Polycarbonate inner trim with acrylic cover lens	
Reflector 38 degree spread	Metalized polycarbonate with faceted, non tarnish finish.	
Output characteristics	3000K warm white – 2390 lumens 20W 4000K neutral white – 2600 lumens 20W 5000K Soft white – 2600 lumens 10W (Lumens are measured at source on PCB)	3000K warm white 4780 lumens 40W 4000K neutral white 5200 lumens 40W 5000K soft white 5200 lumens 40W (Lumens are measured at source on PCB)
Supply voltage	230V AC 50 Hz	230V AC 50Hz
IP rating	IP 20	IP 20
Power factor	Better than 0.95	
Controls	Standard - no control, on or off I-10V control available DMX control available DALI control available KNX control available	

Lumen values are as measured at source - on the PCB - not exiting light fitting. Due to the fast pace of development - values are subject to change at any time and without notice.