

Softlight Tilt square single and duo - (flush plaster option)

Giantlight

EFFECT LIGHTING



Spring mounted with a trim ring
In single or double.




Flush plaster option in
single or double

Giantlight (PTY) LTD

Tel: +27 11 704 1450 / +27 82 451 5506

169 Bush Telegraph Rd, Northlands Business Park North Riding Gauteng South Africa

www.giantlight.co.za email: otto@giantlight.co.za; wolfgang@giantlight.co.za

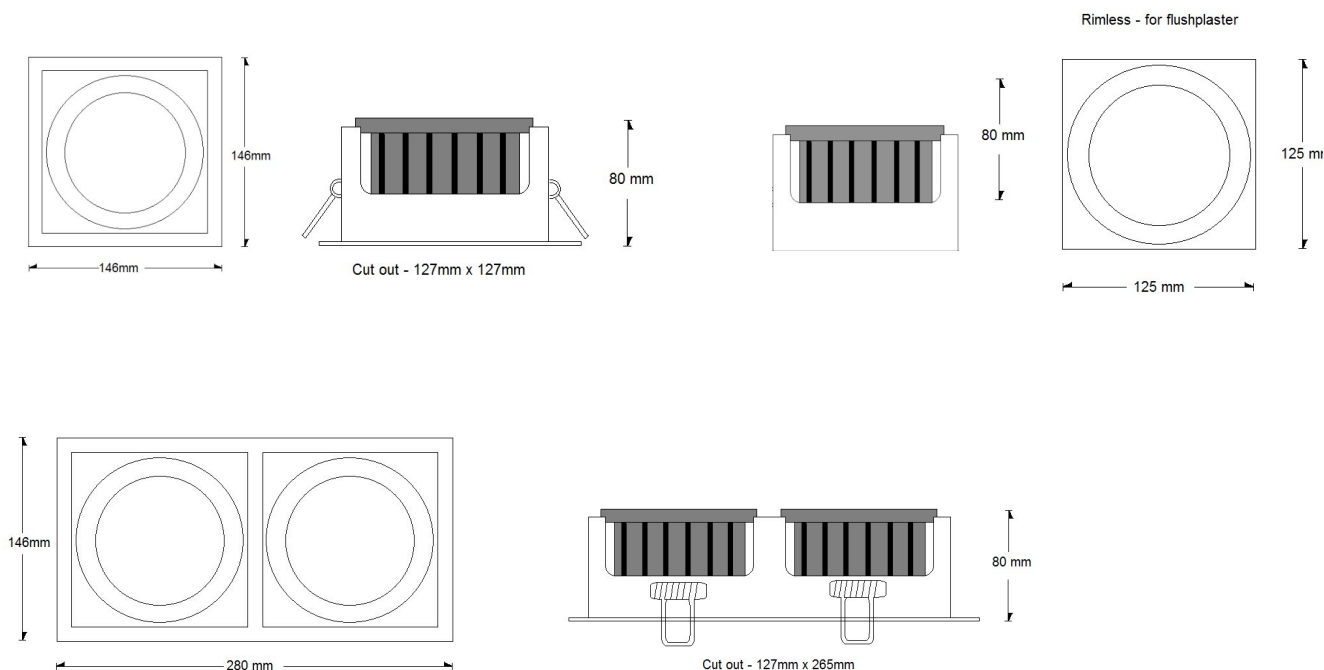

SOFTLIGHT tilt square downlights		
	Softlight tilt single – either flush palster or with trim	Softlight tilt double– either flush palster or with trim
Trim construction	Mild steel powder coated – for outer trim - Polycarbonate inner trim with acrylic cover lens	
Reflector 38 degree spread	Metalised polycarb with faceted, non tarnish finish.	
Output characteristics	3000K warm white – 1800 lumens 20W 4000K neutral white – 2200 lumens 20W 5000K Soft white – 2200 lumens 10W	3000K warm white 3600 lumens 40W 4000K neutral white 4400 lumens 40W 5000K soft white 4400 lumens 40W
Supply voltage	230V AC 50 Hz	230V AC 50Hz
IP rating	IP 20	IP 20
Control – not dimmable as standard, but with correct control gear can be controlled via; Triac dimming, 1-10V, DMX as well as DALI		
Note – Lumens are measured at source –on the LED PCB – not exiting the luminaire. Please refer to IES file for efficiencies.		

Lumen values are as measured at source - on the PCB - not exiting light fitting.
Values are subject to change at any time and without notice.

Giantlight (PTY) LTD

Tel: +27 11 704 1450 / +27 82 451 5506

169 Bush Telegraph Rd, Northlands Business Park North Riding Gauteng South Africa

www.giantlight.co.za email: otto@giantlight.co.za; wolfgang@giantlight.co.za