


LED Mini Cannon

Giantlight

EFFECT LIGHTING

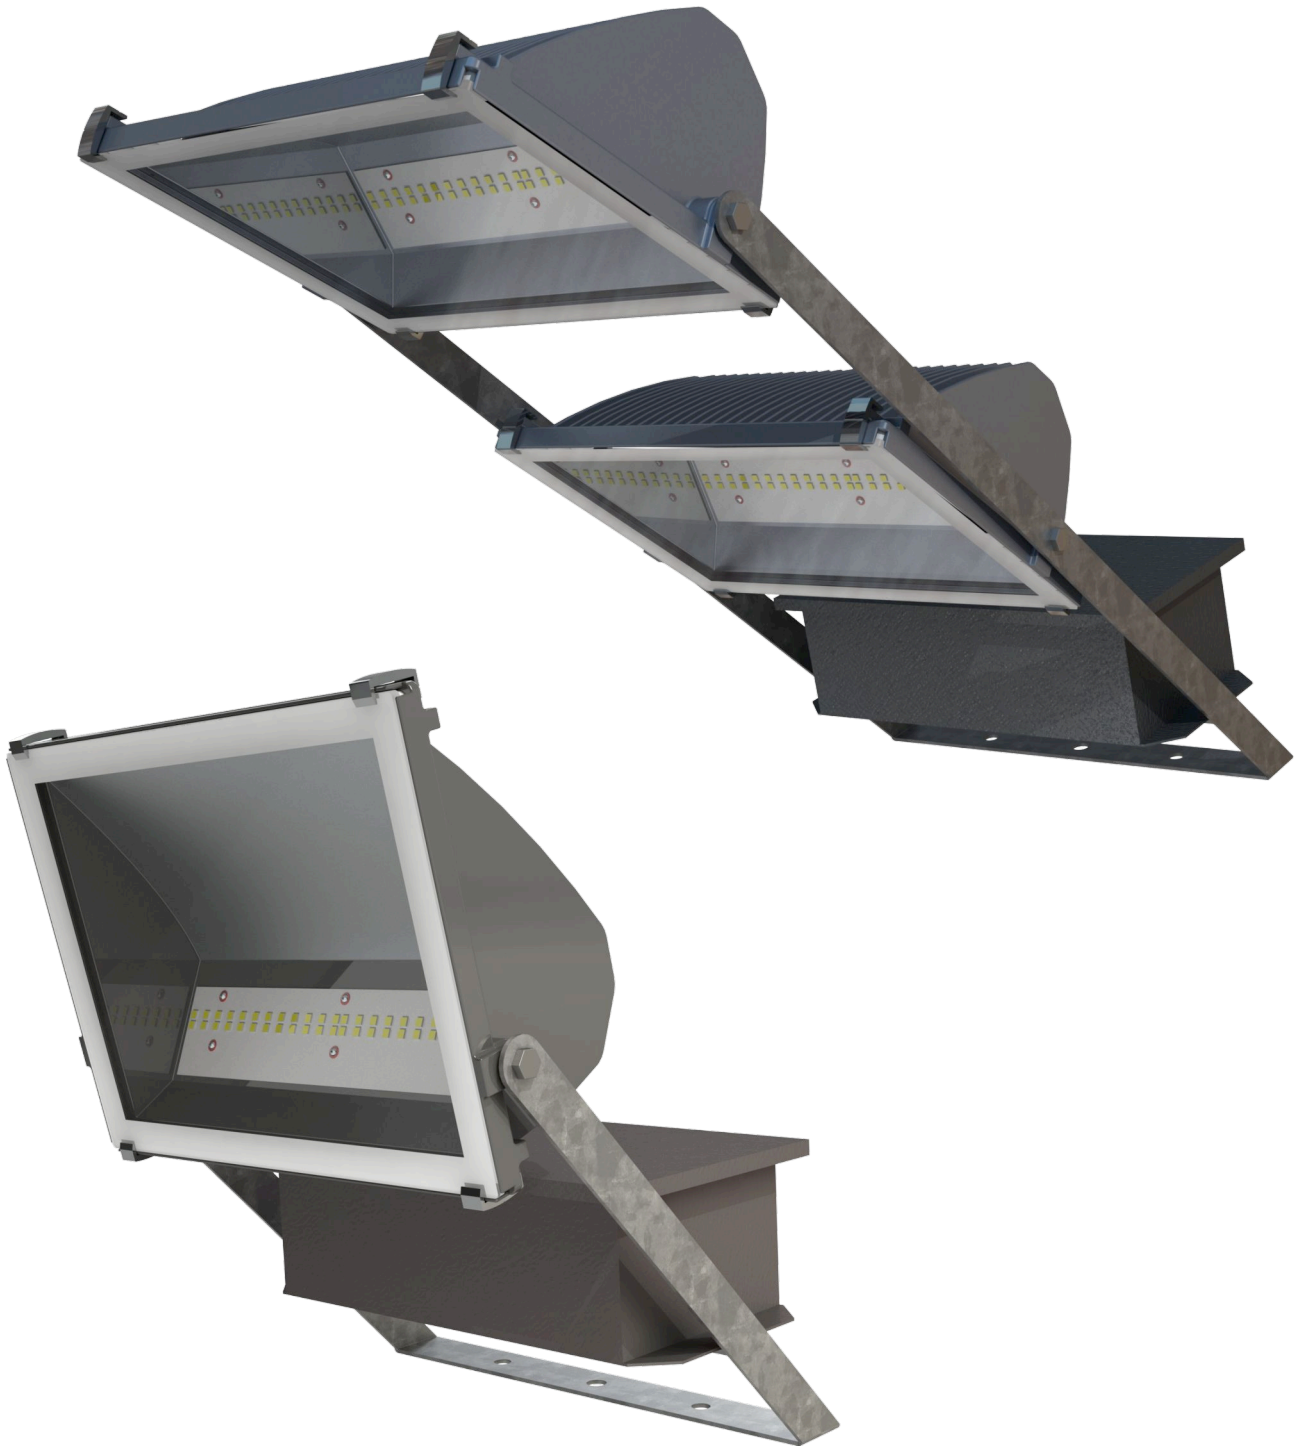

Giantlight (PTY) LTD

Tel: +27 11 704 1450 / +27 82 451 5506

169 Bush Telegraph Rd, Northlands Business Park North Riding Gauteng South Africa
www.giantlight.co.za email: otto@giantlight.co.za; wolfgang@giantlight.co.za




FACT FILE

	Single Colour 220W	Single colour 440W	Single colour 880W
Body construction	Die cast LM6 aluminium - powder coated	Die cast LM6 aluminium - powder coated	Die cast LM6 aluminium - powder coated
Front glass cover	5mm tempered safety glass.	5mm tempered safety glass.	5mm tempered safety glass.
LED type	Lumileds or Luminus or Seoul	Lumileds or Luminus or Seoul	Lumileds or Luminus or Seoul
Lighting performance	146 lumens per W at source – refer to IES files for exact lumens exiting product.	146 lumens per W at source – refer to IES files for exact lumens exiting product.	146 lumens per W at source – refer to IES files for exact lumens exiting product.
CCT	3000K or 4000K or 5000K standard Range from 2400K – 6500 on request – anything in between.	3000K or 4000K or 5000K standard Range from 2400K – 6500 on request – anything in between.	3000K or 4000K or 5000K standard Range from 2400K – 6500 on request – anything in between
CRI	+80 + 90 available on request.	+80 + 90 available on request.	+80 + 90 available on request.
Supply voltage	230V AC/50hz - standard 120 -277V AC - on request	230V AC/50hz - standard 120 -277V AC - on request	230V AC/50hz - standard 120 -277V AC - on request
Additional protection	10KV – standard 20KV – optional Additional high/low voltage resettable switch optional	10KV – standard 20KV – optional Additional high/low voltage resettable switch optional	10KV – standard 20KV – optional Additional high/low voltage resettable switch optional
IP rating	IP 65	IP 65	IP 65
Weight	TBA	TBA	TBA
This product is suitable for operation in outdoor and marine environments. (not suitable for submersion)			

RGBW DMX option to follow

Lumen values are as measured at source - on the PCB - not exiting light fitting.
Values are subject to change at any time and without notice.

Giantlight (PTY) LTD
Tel: +27 11 704 1450 / +27 82 451 5506
169 Bush Telegraph Rd, Northlands Business Park North Riding Gauteng South Africa
www.giantlight.co.za email: otto@giantlight.co.za; wolfgang@giantlight.co.za

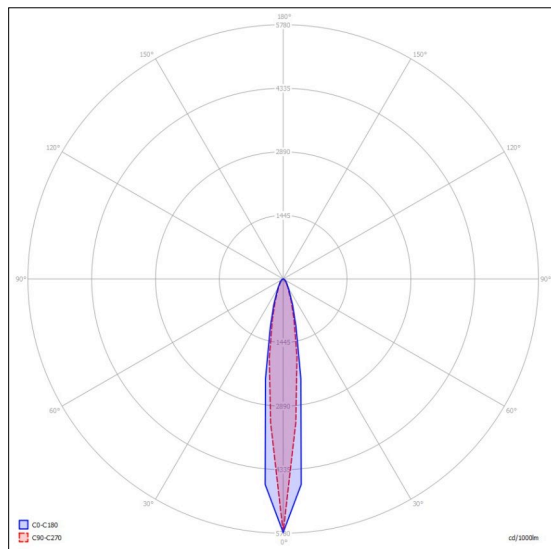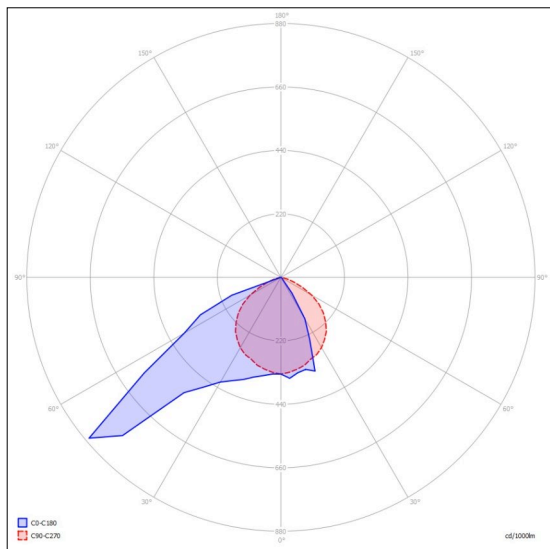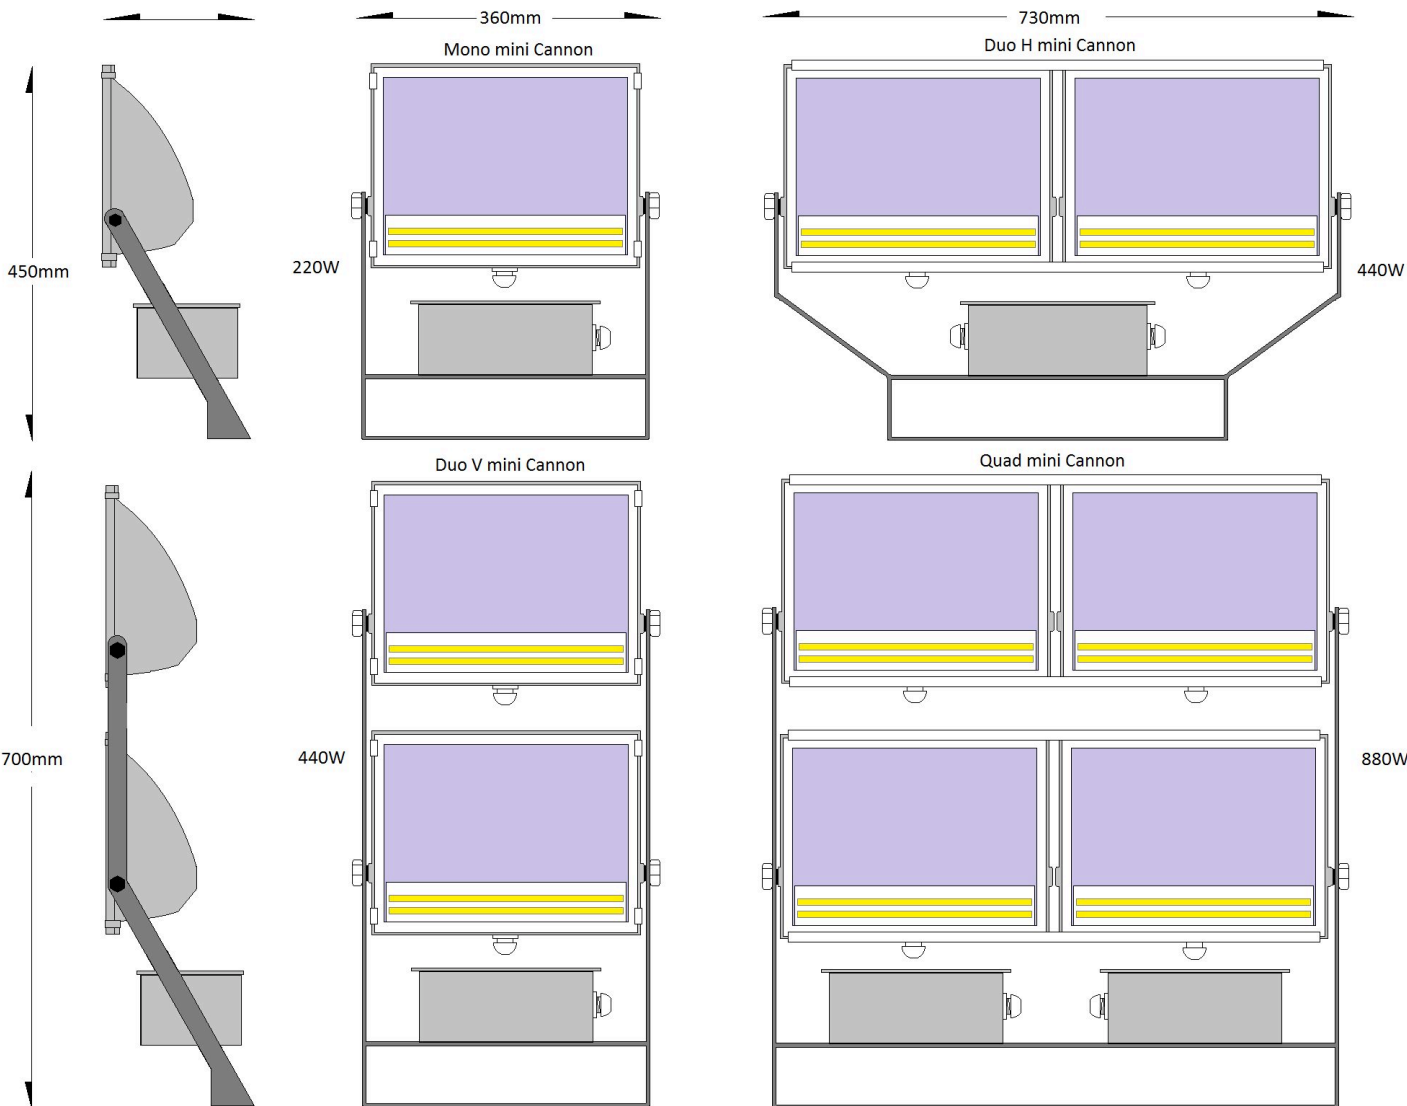

Giantlight (PTY) LTD

Tel: +27 11 704 1450 / +27 82 451 5506

169 Bush Telegraph Rd, Northlands Business Park North Riding Gauteng South Africa

www.giantlight.co.za email: otto@giantlight.co.za; wolfgang@giantlight.co.za