





Ribbon LED in Channel
with Optional Diffuser



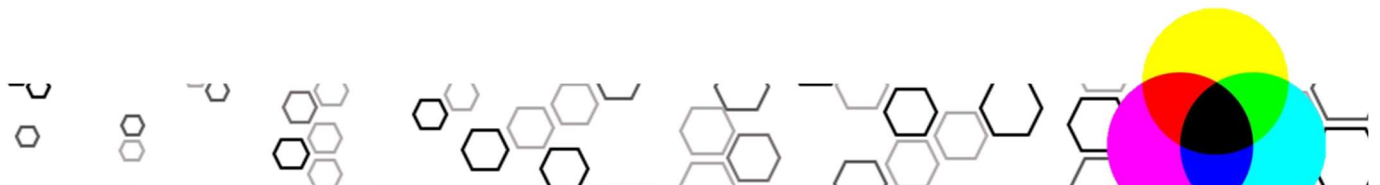

FACT FILE:

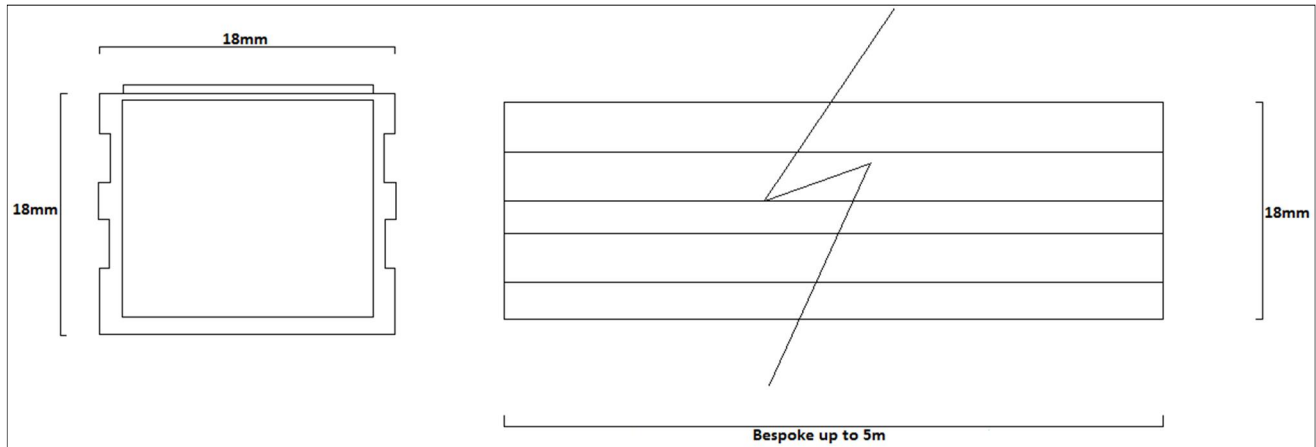

	Single colour	RGBW Colour Mixing
Body construction	Aluminium powder coated Or anodised	Aluminium powder coated Or anodised
Cover lens -optional	Acrylic - satin	Acrylic - satin
Lamp type	Nichia SMD LED	Nichia SMD LED
Lumen per m	Neutral white- 600lumen Warm white - 400 lumen	
Supply voltage	24V DC	Appropriate colour control system
Wattage	5W per m	7.5W per m
Dimmable	Yes but requires correct control gear.	
IP rating	With lens and silicone sleeve IP 65	With lens and silicone sleeve IP 65
LED colours	3000K 4000K 5000K Amber, Red, Green, Blue	RGBW
Installation data	Available	Available

Lumen values are as measured at source - on the PCB - not exiting light fitting.
Due to the fast pace of development - values are subject to change at any time
and without notice.