

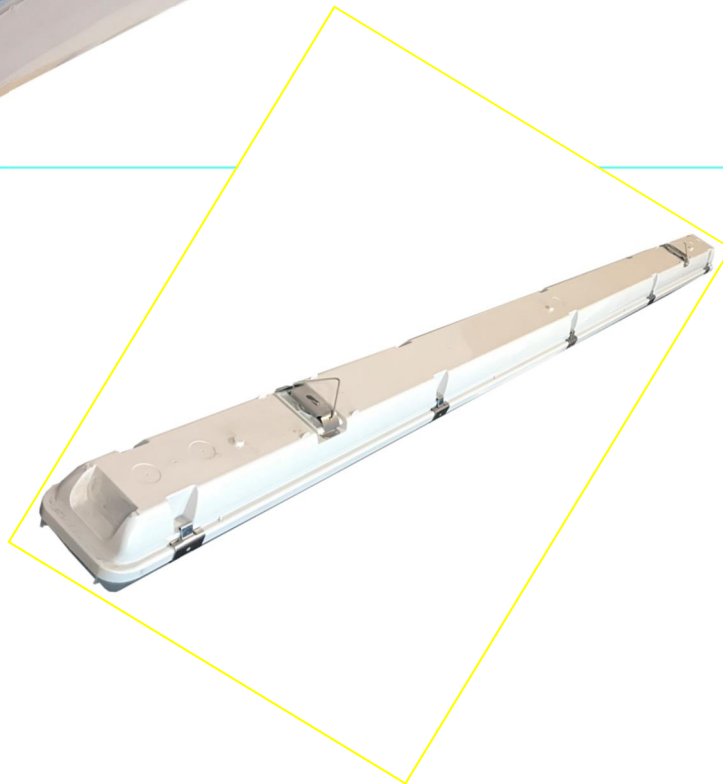



2ft / 4ft / 5ft

Vapour Proof

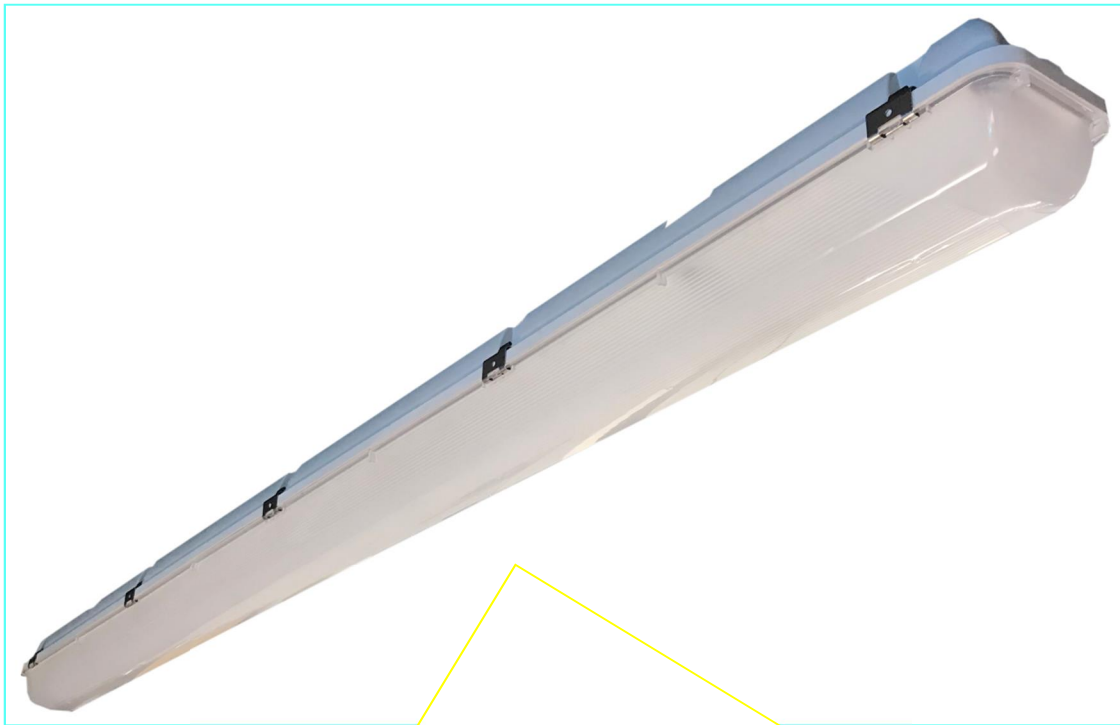

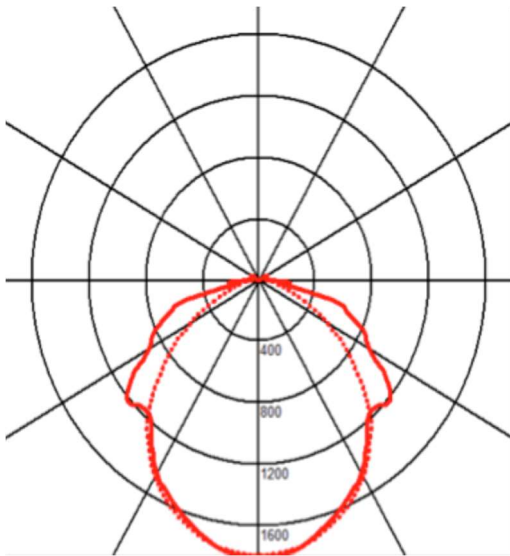

FACT FILE:

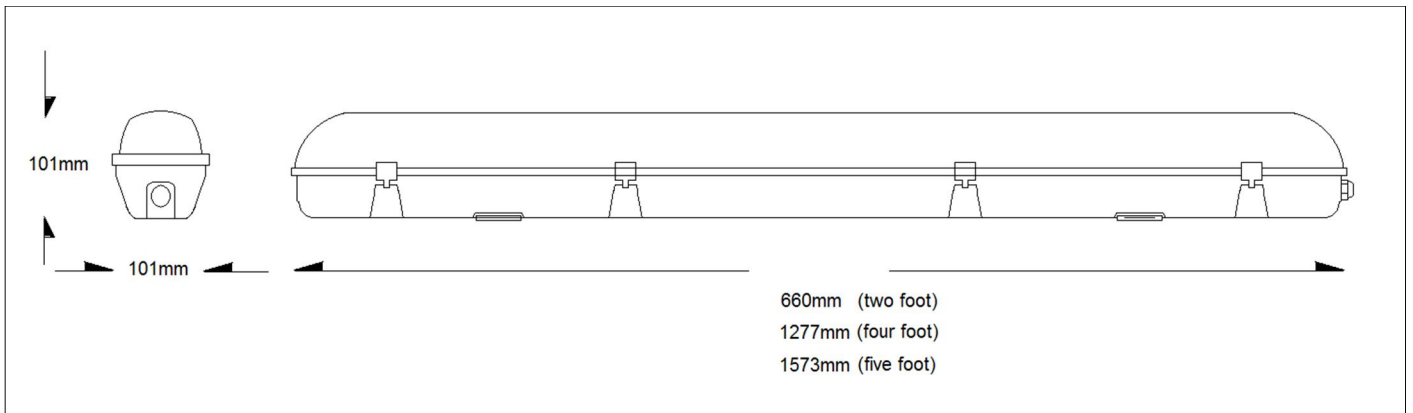

	660mm or 1277mm or 1572mm
Body construction	Polycarbonate with stainless steel latches and mounting hangers.
Cover lens	UV stable Polycarbonate
Supreme Lumen – based on 4000K or 5000K	25W – 4200 lumens - 660mm 50W - 8400 lumens – 1277mm 90W -14500 lumens – 1573mm
Power factor	Better than 0.95
Supply voltage	230V AC
Dimmable	Normally – no , but can be adapted for leading edge or DALI or DMX or 1-10V
IP rating	IP 65
If warm white 3000K is required – the lumen values will drop by 8%	

Lumen values are as measured at source – on the PCB – not exiting light fitting.
Due to the fast pace of development – values are subject to change at any time
and without notice.