


LED Poly Flood / Bulkhead /  
Streetlight Ultra 20W - 43W




Streetlight

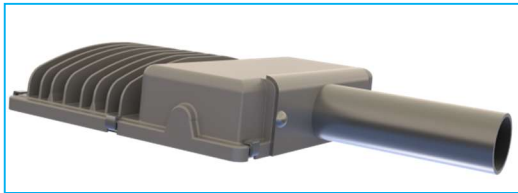


Floodlight





Bulkhead

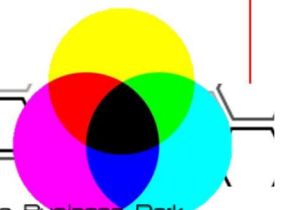

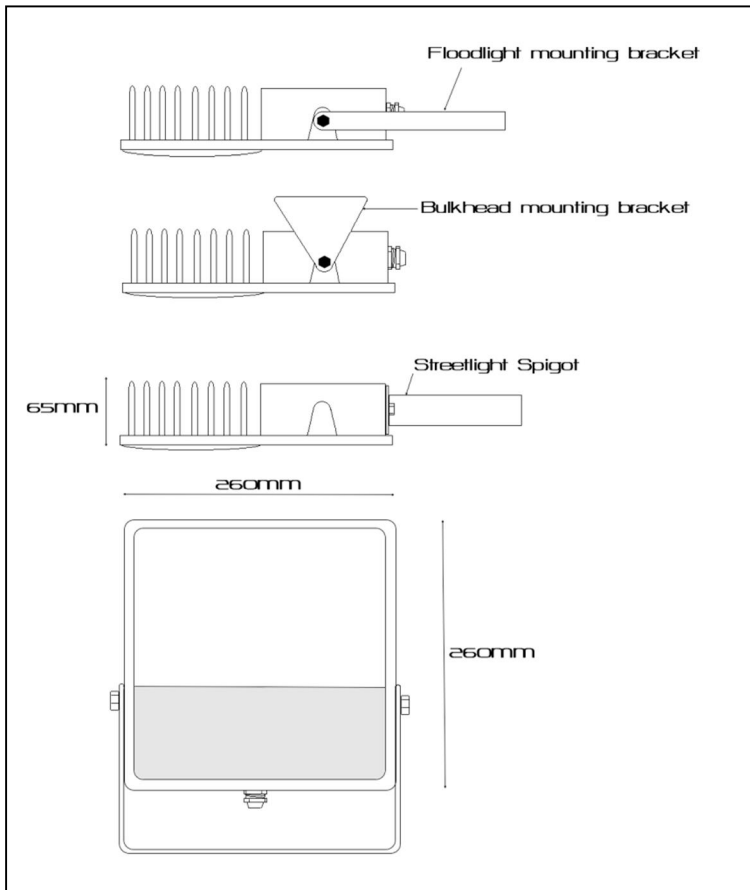

### FACT FILE:

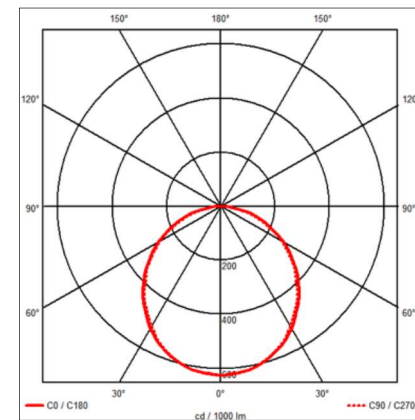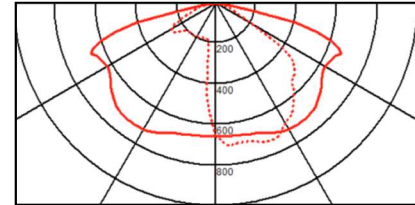

<b>Fact file</b>	
Body construction	Talc filled polyprop - Yoke and Bulkhead bracket Stainless Steel 316.
Lens type	3mm Polycarbonate (UV stabilised) or impact modified Acrylic on request or 4mm toughened glass
Wattage/Lumen options	20W – 3500 lumens on PCB 43W – 7500 Lumens on PCB 5000K or 4000K or 3000K – minimum CRI 80 (2700K and 6500K possible on request)
Lens options – Via Ledil lenses	Wide beam symmetrical – for general purpose floodlighting Ultra wide batwing – with either some forward or backward throw. Narrow beam 24 degree – for accent lighting
Supply voltage	230V AC 50HZ
IP rating	IP 65
Control Type	Standard - no control, on or off DMX control available DALI control available
Power factor	Better than 0,95
Surge arrestor	10KV standard – 20KV on request.
IES files available	Yes

Lumen values are as measured at source – on the PCB – not exiting light fitting.  
Due to the fast pace of development – values are subject to change at any time and without notice.